


Ethernet 10/100 BaseT

- 1 - TX (+)
- 2 - TX (-)
- 3 - RX (+)
- 4 - frei
- 5 - frei
- 6 - RX (-)
- 7 - frei
- 8 - frei

PRI (von der VS gesehen)

- 1 - TX (+)
- 2 - TX (-)
- 3 - frei
- 4 - RX (+)
- 5 - RX (-)
- 6 - frei
- 7 - frei
- 8 - frei

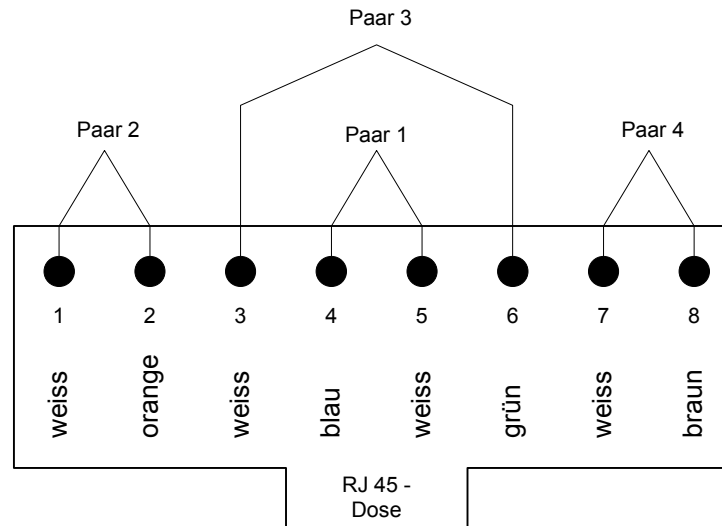


Telefon a/b

- 1 - frei
- 2 - frei
- 3 - W2
- 4 - a
- 5 - b
- 6 - E
- 7 - frei
- 8 - frei

Telefon ISDN So

- 1 - frei
- 2 - frei
- 3 - a2 (TX)
- 4 - a1 (RX)
- 5 - b1 (RX)
- 6 - b2 (TX)
- 7 - frei
- 8 - frei

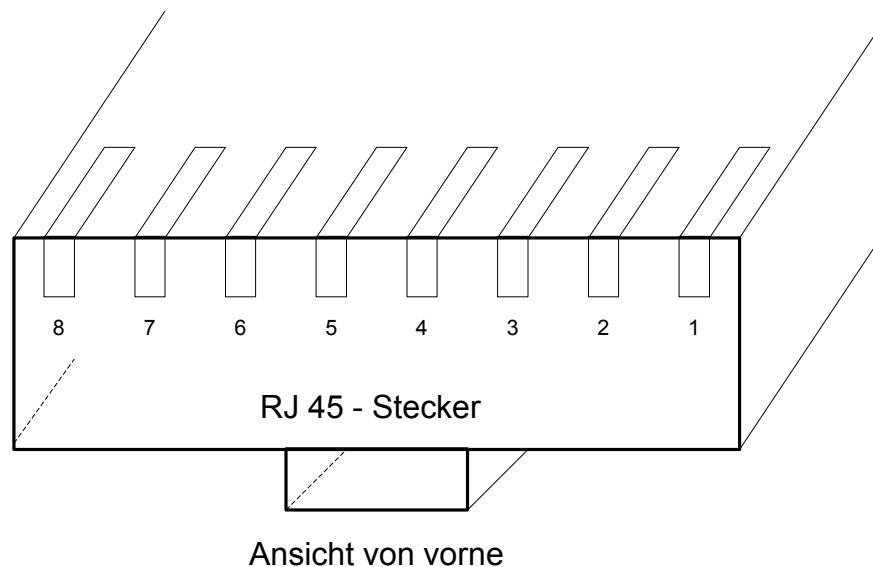


Datum:	Name:	Datensteckdose RJ45 Belegung nach EIA - T 568 B	Blatt: 1
01.07.04	DJ8TM		

Ethernet 10/100 BaseT


- 1 - TX (+)
- 2 - TX (-)
- 3 - RX (+)
- 4 - frei
- 5 - frei
- 6 - RX (-)
- 7 - frei
- 8 - frei

Telefon ISDN So

- 1 - frei
- 2 - frei
- 3 - a2 (TX)
- 4 - a1 (RX)
- 5 - b1 (RX)
- 6 - b2 (TX)
- 7 - frei
- 8 - frei

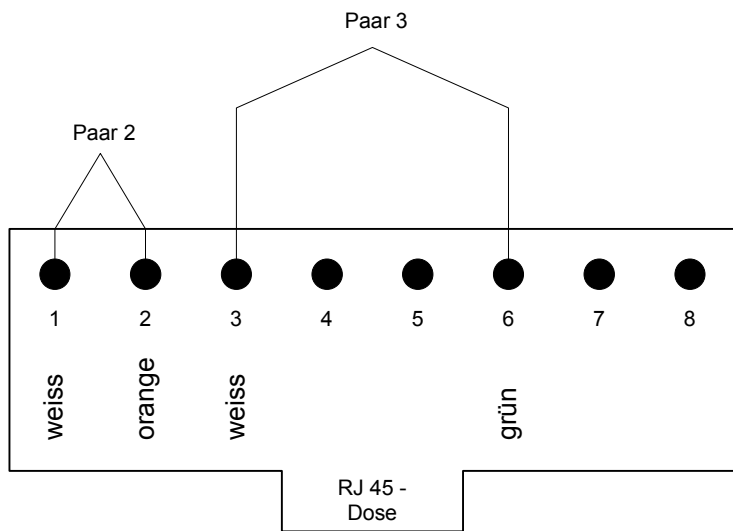

linke Buchse Ethernet

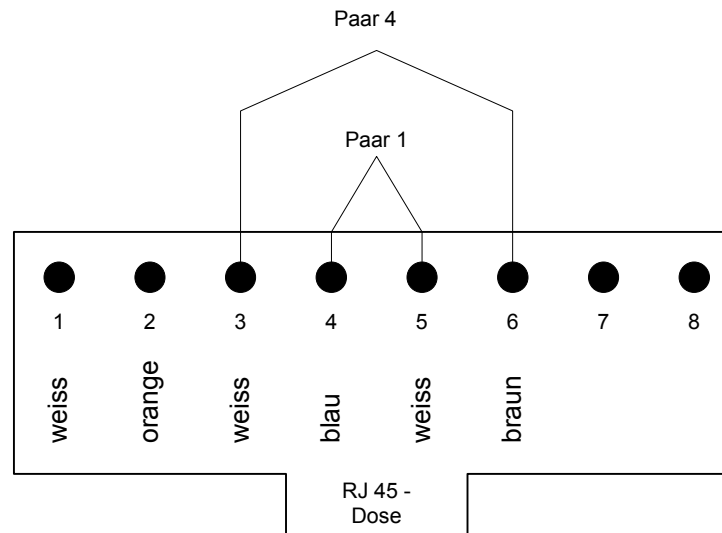

rechte Buchse Telefon

Datum:	Name:	Datensteckdose 2 x RJ45 Sonderbelegung mit ein Kabel an zwei RJ45-Buchsen	Blatt: 2
10.01.2005	DJ8TM		